


AWM-490V2

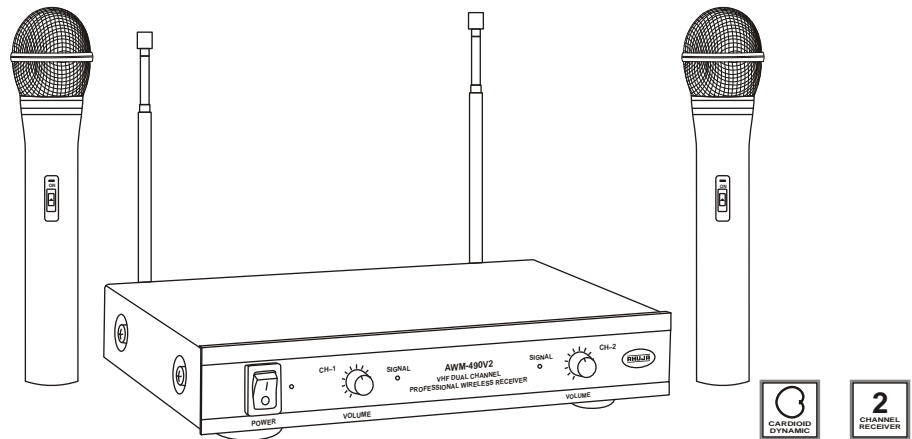

AHUJA introduces AWM-490V2 as an affordable high performance VHF Wireless Microphone System. It consists of two wireless microphones and a highly sensitive dual channel non-diversity receiver. This ensures an effective long distance coverage of more than 150 feet, under ideal working conditions.

FEATURES


- Compact, lightweight, Dual Channel VHF Wireless Microphone System available in 5 different frequencies.
- Operates at Quartz Crystal Locked VHF High Band frequency. Two microphones with separate frequencies and one non-diversity receiver.
- Internal Antennas in the Microphones and two telescopic Antennas in the Receiver for clear and distortion free reception.
- Receiver operates on 9V DC through an AC Adaptor supplied along with the system. Microphone operates with a 9V Dry Battery.
- Microphone with 3-position slide switch for 'Audio On' - 'Audio Mute' - 'Off' positions.
- Green LEDs for Channel-1 & Channel-2 signal indication on receiver.
- Audio output from receiver available at OUT 1 & OUT 2 individually and as mixed output at OUT (1+2).

Thank you for purchasing the AHUJA Professional PA Wireless Microphones.


Please read this manual thoroughly before making connections and turning on the power. Following the instructions in this manual will enable you to obtain optimum performance from your new AHUJA Professional PA Wireless Microphones.

Please retain this manual for future reference.

• Receiver: Front & Rear Panel Controls & Features

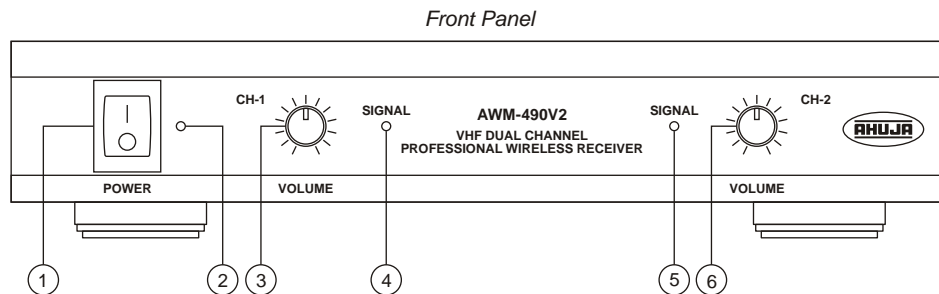

1. **Power Switch**
2. **Power Indicator**
Red LED glows when receiver is switched 'ON'.
3. **Channel-1 Volume Control**
4. **Signal Indicator Channel-1**
Green LED glows when MIC of Channel-1 is switched 'ON'.
5. **Signal Indicator Channel-2**
Green LED glows when MIC of Channel-2 is switched 'ON'.
6. **Channel-2 Volume Control**

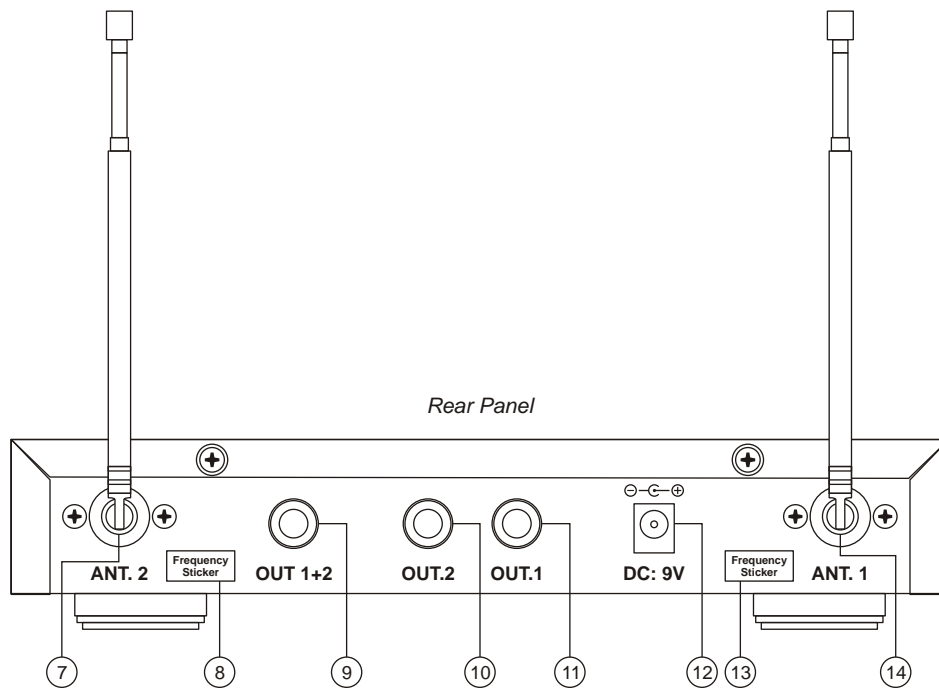


7. **Antenna 2**
8. **Frequency Sticker for Channel 2**
9. **Audio Out Channel 1+2**
Mixed output of Channel 1 and Channel 2.
10. **Audio Out Channel 2**
11. **Audio Out Channel 1**
12. **DC Socket**
For connecting a DC plug of AC Adaptor.
13. **Frequency Sticker for Channel 1**
14. **Antenna 1**


• Operation & Battery Insertion

Receiver


Insert the DC Plug of AC Adaptor in to the receiver. Insert AC Adaptor into the socket of AC mains supply.

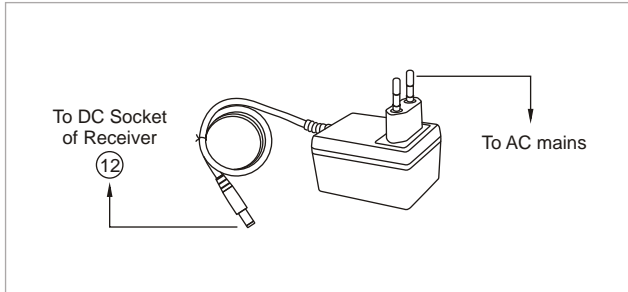

Insert one end of connecting cable to Audio Output socket of Receiver and other end of the cable to the Mic input of an amplifier.

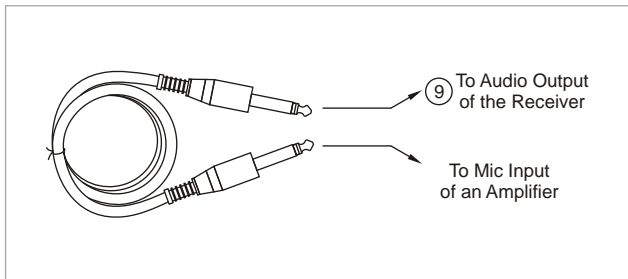

Ensure both the telescopic antennas are fully extended vertically.




Switch ON the Power Switch of the Receiver. Red LED on front panel will glow.

Always keep the receiver antennas away from metal and other reflecting surfaces and obstructions.


Hand-held Microphone

Insert a 9V battery in the battery compartment of the hand-held microphone by unscrewing the lower part of the microphone body.

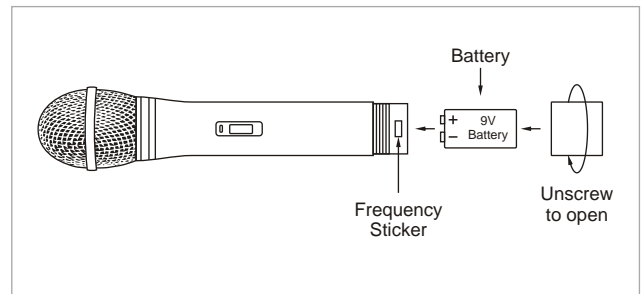

Ensure the 9V battery is inserted with correct polarity.

The microphone has a 3-position slide switch:

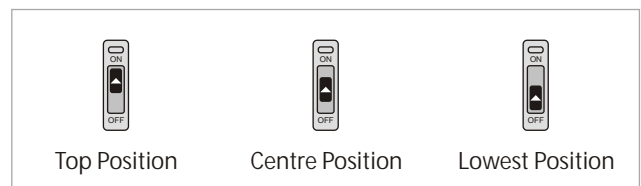

In top position, the microphone is ON and Red LED glows.

The centre of the switch is 'Standby' or 'Audio Mute'. In this position Red LED will glow, RF Carrier frequency will be transmitted, but 'Audio' will be muted.

When the switch is at the lowest position, the microphone will be completely switched off.

• Specifications

Microphone	
RF Output Power	15mW (Max.)
RF Carrier Frequencies	Available in five different VHF High Band frequencies of 201.8MHz, 225.2MHz and 205.3MHz, 229.2MHz and 209.5MHz, 227.9MHz and 215.2MHz, 249.2MHz and 219.2MHz, 247.2MHz
Modulation Mode	FM(F3E)
Microphone Element	Dynamic, cardioid
Dynamic Range	100dB
Spurious Emission	<45dB
Maximum Deviation	±25kHz
Frequency Response	50-15,000Hz
Antenna Type	Internal dipole
Current Consumption	<60mA
Battery Life	6-8 hrs. with 9V battery
Controls	Microphone On/Mute/Off Switch
Indication	Red & Green LEDs for indicating microphones On
Dimensions	ø52 (L242) mm
Weight	0.20kg (w/o battery) approx.

Receiver	
RF Carrier Frequencies	Available in five different VHF High Band frequencies of 201.8MHz, 225.2MHz and 205.3MHz, 229.2MHz and 209.5MHz, 227.9MHz and 215.2MHz, 249.2MHz and 219.2MHz, 247.2MHz
Frequency Stability	± 0.005% Quartz Crystal Controlled
Receiving Method	Non-diversity
Audio Output	Channel 1: 0-55mV / 1kΩ Channel 2: 0-55mV / 1kΩ Channel 1+2: 0-55mV / 1kΩ
S/N Ratio	≥100dB
Distortion	≤0.5%
Frequency Response	50-15,000Hz
Maximum Deviation	±25kHz
Antenna	Telescopic
Power Requirement	240V AC 50Hz for AC adaptor (supplied along with)
Controls	Power On / Off Switch, Volume Control for Channel-1, Volume Control for Channel-2
Indications	Red LED for Power ON Green LED for RF reception on Channel-1 Green LED for RF reception on Channel-2
Dimensions	W210 x H42 x D152 mm
Weight	0.70kg approx.

Accessories	2 x Connection Cable, 1 x AC Adaptor, 2 x 9V Battery
--------------------	--

Licensing Information:

IMPORTANT: Licensing of Ahuja wireless microphone system is the user's responsibility and licensability depends on the user's classification and application, and on the selected frequency. Ahuja strongly urges the user to contact the appropriate telecommunications authority concerning proper licensing, and before choosing and ordering frequencies.

Design and Specifications are subject to change without notice. **AHUJA** is a registered trademark of Ahuja Radios in India and other countries.

© Copyright Ahuja Radios, 2006, reprint 2008. All rights reserved. Any unauthorized reproduction or use of logos, images or design elements is strictly prohibited by law. No part of the compilation may be reproduced in any manner or translated without written permission.

AHUJA RADIOS • 215, Okhla Industrial Estate, New Delhi - 110 020, INDIA

Tel.: +91-11-26831549, 41612474 Fax: +91-11-26847287

E-mail: ahuja@ahujaradios.com, admin@ahujaradios.com

Website: www.ahujaradios.com

3K05/05/R2