#### 2MP IR Dome Camera with 6mm Lens







SATATYA CIDR20FL60CWP

2MP IR Dome Camera with 6mm Lens

Matrix Project Series IP Cameras are built using superior components such as Sony STARVIS sensor and higher MTF lens to offer unmatched image quality especially during the low light conditions. Powered by True WDR algorithm, these cameras offer consistent image quality even in highly varying lighting conditions. Built in intelligent analytics including Intrusion Detection, Trip Wire, etc. ensure real-time security. Moreover, H.265 compression and Automatic Motion based Frame Rate Reduction save bandwidth and storage up to 50%.

#### **USP**



SONY STARVIS SENSOR



SMART STREAMING



H.265



ADAPTIVE STREAMING



IVA



TRUE WDR



HIGHER FIELD OF VIEW



NAS

#### **CERTIFICATION**













Customer Care: 1800-258-7747 E-mail: <a href="mailto:lnquiry@MatrixComSec.com">lnquiry@MatrixComSec.com</a>

www.MatrixVideoSurveillance.com

# 2MP IR Dome Camera with 6mm Lens



| TECHNICAL SPECIFICATIONS |   |  |  |
|--------------------------|---|--|--|
| IMAGE SENSOR             |   |  |  |
| Resolution               | 2 MP (1920 x 1080)  |  |  |
|                          | 1/2.8" SONY - CMOS 2MP Active Pixel   |  |  |
|                          | Progressive Scan, Back Illuminated Image sensor   |  |  |
| Sensor Type and Size     | (EXMOR Technology - STARVIS Series)   |  |  |
| LENS                     |   |  |  |
|                          | Colour - 0.01 Lux @F1.2 (AGC ON)  |  |  |
| Minimum Illumination     | Monochrome - 0 Lux  |  |  |
| Focal Length             | 6mm   |  |  |
| Focus Range              | 0.3m to infinity  |  |  |
|                          | HFOV - 56°  |  |  |
|                          | VFOV - 31°  |  |  |
| Field of View (FOV)      | DFOV - 66°  |  |  |
| Lens Mount               | M12   |  |  |
| Focus                    | Fixed focus   |  |  |
| Aperture (F#)            | F 1.2   |  |  |
| Iris Type                | Fixed   |  |  |
| IR Range                 | 50m   |  |  |
| IR Led Wavelength        | 850nm   |  |  |
| IR Switching             | Auto/ Manual  |  |  |
|                          | AUDIO INTERFACE   |  |  |
| Audio IN                 | 1   |  |  |
| Audio OUT                | 1   |  |  |
| Two-way Audio            | Supported   |  |  |
| Audio Compression        | G.726 and G.711   |  |  |
| Alarm In                 | Yes   |  |  |
| Alarm Out                | Yes   |  |  |
|                          | HARDWARE SPECIFICATIONS   |  |  |
| SD Card                  | Up to 512GB   |  |  |
| Camera Adjustment Angle  | Pan: 0° to 360°   |  |  |
|                          | Tilt: 0° to 75°   |  |  |
|                          | Zoom: 0° to 360°  |  |  |
| IMAGE AND VIDEO          |   |  |  |
| No of Stream Profiles    | 4   |  |  |
|                          | Profile 1: 1080p(2MP)/720p/D1/2CIF/CIF/QCIF up to 30fps (H.265/H.264)   |  |  |
|                          | Profile 2: D1/2CIF/CIF/QCIF up to 30fps (H.265/H.264)   |  |  |
| Stream Profiles          | Profile 3: 1080p(2MP)/720p/D1/2CIF/CIF/QCIF up to 5fps (MJPEG) Profile 4: 720p/D1/2CIF/CIF/QCIF up to 30fps (H.265/H.264/MJPEG) |  |  |
| Stream Fromes            | FTOTILE 4. /200/101/2011/01/2011 up to 3011/3 (17.203/17.204/1911/20)   |  |  |





| Available Resolutions | 1920 x 1080, 720p, D1, 2CIF, CIF, QCIF  |  |
|-----------------------|---|--|
| Max Resolution        | 1920 x 1080   |  |
| Bitrate               | 128 kbps-8Mbps  |  |
| Bitrate Type          | CBR, VBR  |  |
| Video Compression     | H.265, H.264, MJPEG   |  |
| Frame Rate            | 1-30fps   |  |
| Shutter Speed         | 1/25-1/34000  |  |
| Adaptive Streaming    | Yes   |  |
| ONVIF Profiles        | S and G   |  |
| Edge Recording        | Yes   |  |
| Alarm Recording       | Pre and Post  |  |
| Motion Recording      | Yes   |  |
| Video Parameters      | Snapshot, Region of Interest (ROI), BLC, Day/Night Settings   |  |
| Privacy Masks         | 3   |  |
| WDR                   | True WDR (120dB)  |  |
| SNR                   | 71db  |  |
| Image Enhancement     | Saturation/Contrast/Sharpness/Brightness/Auto Exposure  |  |
| DNR                   | 2D &3D  |  |
| Video Analytics       | Motion/No Motion Detection, Tamper Detection, Trip/No Trip Detection, Object Intrusion/Zone Intrusion, Audio Exception, IP Conflict, Network Disconnect, Storage Full, Time Triggered |  |
|                       | EVENTS AND ACTIONS  |  |
| Upload Image          | SD, NAS, FTP  |  |
| Upload Clip           | SD, NAS, FTP  |  |
| Notifications         | E-mail, SMS, TCP  |  |
| PROTOCOLS SUPPORTED   |   |  |
| Supported protocols   | TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTCP, RTSP, PPPOE, SMTP, NTP, HTTPS, TLS/SSL, FTP, ICMP, IGMP v2 & v3   |  |
| Web Viewer            | Supported in IE 8.0-11.0, Firefox 15.0-47.0, Chrome 20.0-54.0   |  |
| Plugins               | IE: Matrix ActiveX Chrome: VLC plugin (2.0.4) and Quicktime (7.7.5) Mozilla: VLC plugin (2.0.4) and Quicktime (7.7.5)   |  |
| OPERATING PARAMETERS  |   |  |
| Power Supply          | 12V (DC); 802.3af (PoE)   |  |
| Power Consumption     | <7W   |  |
| Operating Humidity    | Less than 90% RH (non-condensing)   |  |
| Operating Temperature | -20°C to 50°C   |  |
| Storage Temperature   | -20°C to 50°C   |  |
|                       |   |  |






| PHYSICAL PARAMETERS     |                                     |  |
|-------------------------|-------------------------------------|--|
| Communication interface | 10Base-T/100BaseTX Ethernet (RJ-45) |  |
| Weight                  | 1410gm                              |  |
| Colour                  | Pantone 7527C                       |  |
| Dimensions              | Ф158 x 134 mm                       |  |
| Storage                 | NAS, SD Card                        |  |
| Certifications          | CE, FCC, ROHS, BIS, IP66, IK10, UL  |  |

### 2MP IR Dome Camera with 6mm Lens



### **DIMENSIONS** (in mm)

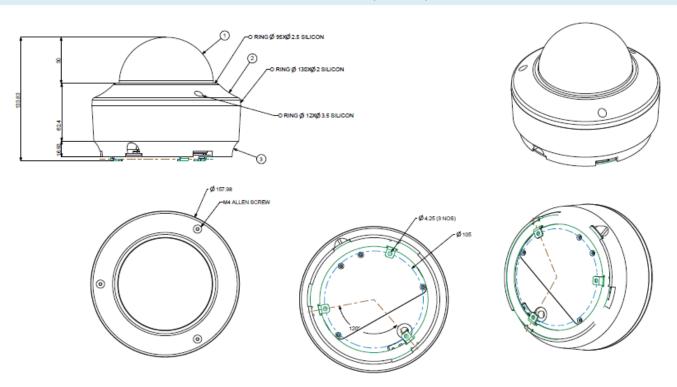

#### **ABOUT MATRIX**

Established in 1991, Matrix is a leader in security and telecom solutions for modern businesses and enterprises. Matrix, an innovative, technology driven and customer focused organization, is committed to keep pace with the revolutions in security and telecom industries. With more than 40% of its human resources dedicated to the development of new products, Matrix has launched cutting-edge products such as Unified Communications, IP-PBX, Universal Gateways, Convergence, VOIP Gateways, GSM Gateways, IP Video Surveillance, Access Control and Time-Attendance. These solutions are feature-rich, reliable and conform to the international standards. Having global footprints in Europe, North America, South America, Africa and Asia through an extensive network of more than 1000 system integrators, Matrix ensures that the products serve the needs of its customers faster and longer. Matrix has gained trust and admiration of customers representing the entire spectrum of industries. Matrix has won many national and international awards for its innovative products.

\* Specifications are subject to change without prior notice.

Note: IK10 certificate shall be available from March'20.