### 2MP IR Dome Camera with 2.8-12mm Lens







SATATYA CIDR20VL12CWS

2MP IR Dome Camera with 2.8-12mm
Lens

Matrix Project Series IP Cameras are built using superior components such as Sony STARVIS sensor and higher MTF lens to offer unmatched image quality especially during the low light conditions. Powered by True WDR algorithm, these cameras offer consistent image quality even in highly varying lighting conditions. Built in intelligent analytics including Intrusion Detection, Trip Wire, etc. ensure real-time security. Moreover, H.265 compression and Automatic Motion based Frame Rate Reduction save bandwidth and storage up to 50%.

#### **USP**



SONY STARVIS SENSOR



SMART STREAMING



H.265



ADAPTIVE STREAMING



IVA



TRUE WDR



HIGHER FIELD OF VIEW



NAS

#### **CERTIFICATION**













Customer Care: 1800-258-7747 E-mail: <a href="mailto:lnguiry@MatrixComSec.com">lnguiry@MatrixComSec.com</a>





TECHNICAL SPECIFICATIONS		
IMAGE SENSOR		
Resolution	2 MP (1920 x 1080)	
	1/2.8" SONY - CMOS 2MP Active Pixel	
	Progressive Scan, Back Illuminated Image sensor	
Sensor Type and Size	(EXMOR Technology - STARVIS Series)	
	LENS	
	Colour - 0.01 Lux @F1.2 (AGC ON)	
Minimum Illumination	Monochrome - 0 Lux	
Focal Length	2.8mm-12mm	
Focus Range	0.3m to infinity	
	HFOV: 98° - 33°	
	VFOV: 51° - 19°	
Field of View (FOV)	DFOV: 116° - 38°	
Lens Mount	M14	
Focus	Manual focus	
Aperture (F#)	F 1.4 – F 2.8	
Iris Type	P Iris	
IR Range	50m	
IR Led Wavelength	850nm	
IR Switching	Auto/ Manual	
	HARDWARE SPECIFICATIONS	
SD Card	Up to 512GB	
Camera Adjustment Angle	Pan: 0° to 360°	
	Tilt: 0° to 75°	
	Zoom: 0° to 360°	
IMAGE AND VIDEO		
No of Stream Profiles	4	
	Profile 1: 1080p(2MP)/720p/D1/2CIF/CIF/QCIF up to 30fps (H.265/H.264)	
	Profile 2: D1/2CIF/CIF/QCIF up to 30fps (H.265/H.264)	
Stroom Brofiles	Profile 3: 1080p(2MP)/720p/D1/2CIF/CIF/QCIF up to 5fps (MJPEG)	
Stream Profiles	Profile 4: 720p/D1/2CIF/CIF/QCIF up to 30fps (H.265/H.264/MJPEG)	
Available Resolutions	1920 x 1080, 720p, D1, 2CIF, CIF, QCIF 1920 x 1080	
Max Resolution		
Bitrate Type	128 kbps-8Mbps	
Bitrate Type	CBR, VBR	
Video Compression	H.265, H.264, MJPEG	
Frame Rate	1-30fps	
Shutter Speed	1/25-1/34000	

Customer Care: 1800-258-7747 E-mail: <a href="mailto:lnquiry@MatrixComSec.com">lnquiry@MatrixComSec.com</a> www.MatrixVideoSurveillance.com



## 2MP IR Dome Camera with 2.8-12mm Lens


Adaptive Streaming	Yes
ONVIF Profiles	S and G
Edge Recording	Yes
Alarm Recording	Pre and Post
Motion Recording	Yes
Video Parameters	Snapshot, Region of Interest (ROI), BLC, Day/Night Settings
Privacy Masks	3
WDR	True WDR (120dB)
SNR	71db
Image Enhancement	Saturation/Contrast/Sharpness/Brightness/Auto Exposure
DNR	2D &3D
Video Analytics	Motion/No Motion Detection, Tamper Detection, Trip/No Trip Detection, Object Intrusion/Zone Intrusion, IP Conflict, Network Disconnect, Storage Full, Time Triggered  EVENTS AND ACTIONS
Upload Image	SD, NAS, FTP
Upload Clip	SD, NAS, FTP
Notifications	E-mail, SMS, TCP
	PROTOCOLS SUPPORTED
Supported protocols	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTCP, RTSP, PPPOE, SMTP, NTP, HTTPS, TLS/SSL, FTP, ICMP, IGMP v2 & v3
Web Viewer	Supported in IE 8.0-11.0, Firefox 15.0-47.0, Chrome 20.0-54.0
	IE: Matrix ActiveX
	Chrome: VLC plugin (2.0.4) and Quicktime (7.7.5)
Plugins	Mozilla: VLC plugin (2.0.4) and Quicktime (7.7.5)
OPERATING PARAMETERS	
Power Supply	12V (DC); 802.3af (PoE)
Power Consumption	<7W
Operating Humidity	Less than 90% RH (non-condensing)
Operating Temperature	-20°C to 50°C
Storage Temperature	-20°C to 50°C
PHYSICAL PARAMETERS	
Communication interface	10Base-T/100BaseTX Ethernet (RJ-45)
Weight	1410gm
Colour	Pantone 7527C
Dimensions	Ф158 x 134 mm
Storage	NAS, SD Card
Certifications	CE, FCC, ROHS, BIS, IP66, IK10, UL

Customer Care: 1800-258-7747 E-mail: <a href="mailto:lnquiry@MatrixComSec.com">lnquiry@MatrixComSec.com</a> www.MatrixVideoSurveillance.com

### 2MP IR Dome Camera with 2.8-12mm Lens



### **DIMENSIONS** (in mm)

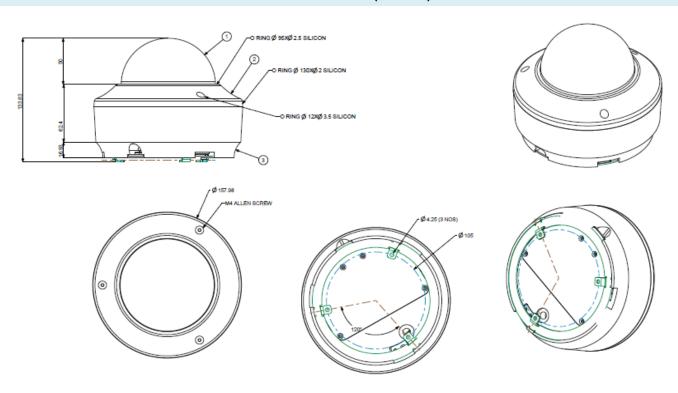

#### **ABOUT MATRIX**

Established in 1991, Matrix is a leader in security and telecom solutions for modern businesses and enterprises. Matrix, an innovative, technology driven and customer focused organization, is committed to keep pace with the revolutions in security and telecom industries. With more than 40% of its human resources dedicated to the development of new products, Matrix has launched cutting-edge products such as Unified Communications, IP-PBX, Universal Gateways, Convergence, VOIP Gateways, GSM Gateways, IP Video Surveillance, Access Control and Time-Attendance. These solutions are feature-rich, reliable and conform to the international standards. Having global footprints in Europe, North America, South America, Africa and Asia through an extensive network of more than 1000 system integrators, Matrix ensures that the products serve the needs of its customers faster and longer. Matrix has gained trust and admiration of customers representing the entire spectrum of industries. Matrix has won many national and international awards for its innovative products.

\* Specifications are subject to change without prior notice.

Customer Care: 1800-258-7747 E-mail: <a href="mailto:lnquiry@MatrixComSec.com">lnquiry@MatrixComSec.com</a> www.MatrixVideoSurveillance.com