### 3MP IR Dome Camera with 2.8mm Lens







SATATYA CIDR30FL28CWS
3MP IR Dome Camera with 2.8mm Lens

Matrix Project Series IP Cameras are built using superior components such as Sony STARVIS sensor and higher MTF lens to offer unmatched image quality especially during the low light conditions. Powered by True WDR algorithm, these cameras offer consistent image quality even in highly varying lighting conditions. Built in intelligent analytics including Intrusion Detection, Trip Wire, etc. ensure real-time security. Moreover, H.265 compression and Automatic Motion based Frame Rate Reduction save bandwidth and storage up to 50%.

### **USP**



SONY STARVIS SENSOR



SMART STREAMING



H.265



ADAPTIVE STREAMING



IVA



TRUE WDR



HIGHER FIELD OF VIEW



NAS

#### **CERTIFICATION**













Customer Care: 1800-258-7747 E-mail: Inquiry@MatrixComSec.com

www.MatrixVideoSurveillance.com





TECHNICAL SPECIFICATIONS IMAGE SENSOR		
	1/2.8" SONY - CMOS 3MP Active Pixel	
	Progressive Scan, Back Illuminated Image sensor	
Sensor Type and Size	(EXMOR Technology - STARVIS Series)	
LENS		
	Colour - 0.01 Lux @F1.2 (AGC ON)	
Minimum Illumination	Monochrome - 0 Lux	
Focal Length	2.8mm	
Focus Range	0.3m to infinity	
	HFOV - 101°	
	VFOV - 75°	
Field of View (FOV)	DFOV - 127°	
Lens Mount	M12	
Focus	Fixed focus	
Aperture (F#)	F 1.2	
Iris Type	Fixed	
IR Range	50m	
IR Led Wavelength	850nm	
IR Switching	Auto/ Manual	
	HARDWARE SPECIFICATIONS	
SD Card	Up to 512GB	
Camera Adjustment Angle	Pan: 0° to 360°	
	Tilt: 0° to 75°	
	Zoom: 0° to 360°	
IMAGE AND VIDEO		
No of Stream Profiles	4	
	Profile 1: 2048X1536 @30fps (H.264/H.265)	
	Profile 2: D1 @30fps (H.265/H.264)	
Student Buefiles	Profile 3: 2048x1536@5fps (MJPEG)	
Stream Profiles	Profile 4: 720p @30fps (H.265/H.264/MJPEG)	
Available Resolutions	2048 x 1536, 1920 x 1080, 720p, D1, 2CIF, CIF, QCIF	
Max Resolution	2048 x 1536	
Bitrate  Bitrate Type	128kbps-8Mbps CBR, VBR	
Bitrate Type Video Compression	H.265, H.264, MJPEG	
Frame Rate	1-30fps	
Shutter Speed	1/25-1/17000 s	

Customer Care: 1800-258-7747 E-mail: <a href="mailto:lnquiry@MatrixComSec.com">lnquiry@MatrixComSec.com</a> www.MatrixVideoSurveillance.com






Adaptive Streaming	Yes	
ONVIF Profiles	S and G	
Edge Recording	Yes	
Alarm Recording	Pre and Post	
Motion Recording	Yes	
Video Parameters	Snapshot, Region of Interest (ROI), BLC, Day/Night Settings	
Privacy Masks	3	
WDR	True WDR (120dB)	
SNR	73db	
Image Enhancement	Saturation/Contrast/Sharpness/Brightness/Auto Exposure	
DNR	2D &3D	
Video Analytics	Motion/No Motion Detection, Tamper Detection, Trip/No Trip Detection, Object Intrusion/Zone Intrusion, IP Conflict, Network Disconnect, Storage Full, Time Triggered  EVENTS AND ACTIONS	
Upload Image	SD, NAS, FTP	
Upload Clip	SD, NAS, FTP	
Notifications	E-mail, SMS, TCP	
PROTOCOLS SUPPORTED		
Supported protocols	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTCP, RTSP, PPPOE, SMTP, NTP, HTTPS, TLS/SSL, FTP, ICMP, IGMP v2 & v3	
Web Viewer	Supported in IE 8.0-11.0, Firefox 15.0-47.0, Chrome 20.0-54.0	
	IE: Matrix ActiveX	
	Chrome: VLC plugin (2.0.4) and Quicktime (7.7.5)	
Plugins	Mozilla: VLC plugin (2.0.4) and Quicktime (7.7.5)	
OPERATING PARAMETERS		
Power Supply	12V (DC); 802.3af (PoE)	
Power Consumption	<7W	
Operating Humidity	Less than 90% RH (non-condensing)	
Operating Temperature	-20°C to 50°C	
Storage Temperature	-20°C to 50°C	
PHYSICAL PARAMETERS		
Communication interface	10Base-T/100BaseTX Ethernet (RJ-45)	
Weight	1410gm	
Colour	Pantone 7527C	
Dimensions	Ф158 x 134 mm	
Storage	NAS, SD Card	
Certifications	CE, FCC, ROHS, BIS, IP66, IK10, UL	

Customer Care: 1800-258-7747 E-mail: <a href="mailto:lnquiry@MatrixComSec.com">lnquiry@MatrixComSec.com</a> www.MatrixVideoSurveillance.com

### 3MP IR Dome Camera with 2.8mm Lens



## **DIMENSIONS** (in mm)

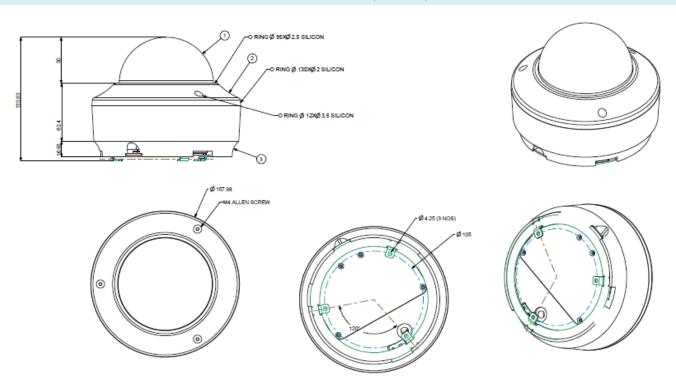

#### **ABOUT MATRIX**

Established in 1991, Matrix is a leader in security and telecom solutions for modern businesses and enterprises. Matrix, an innovative, technology driven and customer focused organization, is committed to keep pace with the revolutions in security and telecom industries. With more than 40% of its human resources dedicated to the development of new products, Matrix has launched cutting-edge products such as Unified Communications, IP-PBX, Universal Gateways, Convergence, VOIP Gateways, GSM Gateways, IP Video Surveillance, Access Control and Time-Attendance. These solutions are feature-rich, reliable and conform to the international standards. Having global footprints in Europe, North America, South America, Africa and Asia through an extensive network of more than 1000 system integrators, Matrix ensures that the products serve the needs of its customers faster and longer. Matrix has gained trust and admiration of customers representing the entire spectrum of industries. Matrix has won many national and international awards for its innovative products.

\* Specifications are subject to change without prior notice.

Customer Care: 1800-258-7747 E-mail: <a href="mailto:lnquiry@MatrixComSec.com">lnquiry@MatrixComSec.com</a> www.MatrixVideoSurveillance.com