### 2MP IR Dome Camera with 3.6mm Lens







#### SATATYA MIDR20FL36CWP

2MP IR Dome Camera with 3.6mm Lens

Matrix Professional Series Dome IP Cameras are built using superior components such as Sony STARVIS sensor and higher MTF lens to offer unmatched image quality especially during the low light conditions. Powered by True WDR algorithm, these cameras offer consistent image quality even in highly varying lighting conditions. Built in intelligent analytics including Intrusion Detection, Trip Wire, etc. ensure real-time security. Moreover, H.265 compression and Automatic Motion based Frame Rate Reduction save bandwidth and storage up to 50%.

#### **USP**



SONY STARVIS SENSOR



SMART STREAMING



H.265



ADAPTIVE STREAMING



IVA



TRUE WDR



HIGHER FIELD OF VIEW



NAS

### **CERTIFICATION**













Customer Care: 1800-258-7747 E-mail: Inquiry@MatrixComSec.com

www.MatrixVideoSurveillance.com





TECHNICAL SPECIFICATIONS IMAGE SENSOR		
	1/2.8" SONY - CMOS 2MP Active Pixel	
	Progressive Scan, Back Illuminated Image sensor	
Sensor Type and Size	(EXMOR Technology - STARVIS Series)	
LENS		
	Colour - 0.01 Lux @ F1.2 (AGC ON)	
Minimum Illumination	Monochrome - 0 Lux	
Focal Length	3.6mm	
Focus Range	0.3m to infinity	
	HFOV - 90°	
	VFOV - 47°	
Field of View (FOV)	DFOV - 110°	
Lens Mount	M12	
Focus	Fixed focus	
Aperture (F#)	F 1.2	
Iris Type	Fixed	
IR Range	30m	
IR Led Wavelength	850nm	
IR Switching	Auto/ Manual	
	AUDIO INTERFACE	
Audio IN	1	
Audio OUT	1	
Two-way Audio	Supported	
Audio Compression	G.726 and G.711	
HARDWARE SPECIFICATIONS		
SD Card	Up to 512GB	
Camera Adjustment Angle	Pan: 0° to 360°	
	Tilt: 0° to 75°	
	Zoom: 0° to 360°	
IMAGE AND VIDEO		
No of Stream Profiles	4	
	Profile 1: 1080p(2MP)/720p/D1/2CIF/CIF/QCIF up to 30 fps (H.265/	
	H.264) Profile 2: D1/2CIF/CIF/QCIF up to 30fps (H.265/H.264)	
	Profile 3: 1080p(2MP)/720p/D1/2CIF/CIF/QCIF up to 5 fps (MJPEG)	
Stream Profiles	Profile 4: 720p/D1/2CIF/CIF/QCIF up to 30 fps (H.265/H.264/MJPEG)	
Available Resolutions	1920 x 1080, 720p, D1, 2CIF, CIF, QCIF	
Available Resolutions	1320 % 1000, 720p, D1, 2011, O11, QCII	

Customer Care: 1800-258-7747 E-mail: <a href="mailto:lnquiry@MatrixComSec.com">lnquiry@MatrixComSec.com</a> www.MatrixVideoSurveillance.com





Max Resolution	1920 x 1080	
Bitrate	128 kbps-8Mbps	
Bitrate Type	CBR, VBR	
Video Compression	H.265, H.264, MJPEG	
Frame Rate	1-30fps	
Shutter Speed	1/25-1/34000	
Adaptive Streaming	Yes	
ONVIF Profiles	Both S and G	
Edge Recording	Yes	
Alarm Recording	Pre and Post	
Motion Recording	Yes	
Video Parameters	Snapshot, Region of Interest (ROI), BLC, Day/Night Settings	
Privacy Masks	3	
WDR	True WDR (120dB)	
SNR	71db	
Image Enhancement	Saturation/ Contrast/ Sharpness/Brightness/Auto Exposure	
DNR	2D &3D	
Video Analytics	Motion/No Motion Detection, Tamper Detection, Trip/No Trip Detection, Object Intrusion/Zone Intrusion, IP Conflict, Network Disconnect, Audio Exception, Storage Full, Time Triggered	
EVENTS AND ACTIONS  OR MASS STR		
Upload Image	SD, NAS, FTP	
Upload Clip Notifications	SD, NAS, FTP E-mail, SMS, TCP	
Notifications	PROTOCOLS SUPPORTED	
Supported protocols	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTCP, RTSP, PPPOE, SMTP, NTP, HTTPS, TLS/SSL, FTP, ICMP, IGMP v2 & v3	
Web Viewer	Supported in IE 8.0-11.0, Firefox 15.0-47.0, Chrome 20.0-54.0	
Plugins	IE: Matrix ActiveX Chrome: VLC plugin (2.0.4) and Quicktime (7.7.5) Mozilla: VLC Plugin (2.0.4) and Quicktime (7.7.5)	
OPERATING PARAMETERS		
Power Supply	12V (DC); 802.3af (PoE)	
Power Consumption	<5.5W	
Operating Humidity	Less than 90% RH (non-condensing)	
Operating Temperature	0°C to 50°C	
Storage Temperature	-20°C to 50°C  PHYSICAL PARAMETERS	
Communication interface	10Base-T/100BaseTX Ethernet (RJ-45)	

Customer Care: 1800-258-7747 E-mail: <a href="mailto:lnquiry@MatrixComSec.com">lnquiry@MatrixComSec.com</a> www.MatrixVideoSurveillance.com






Weight	450gm
Colour	Pantone 7527C
Dimensions	110mm x 85mm (Length x Width)
Storage	NAS, SD Card
Certifications	BIS, CE, IP66, FCC Part-15 Class-A, ONVIF S & G, IK10


Customer Care: 1800-258-7747 E-mail: Inquiry@MatrixComSec.com www.MatrixVideoSurveillance.com

### 2MP IR Dome Camera with 3.6mm Lens



### **DIMENSIONS** (in mm)

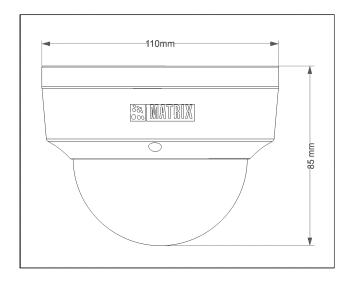



#### **ABOUT MATRIX**

Established in 1991, Matrix is a leader in security and telecom solutions for modern businesses and enterprises. Matrix, an innovative, technology driven and customer focused organization, is committed to keep pace with the revolutions in security and telecom industries. With more than 40% of its human resources dedicated to the development of new products, Matrix has launched cutting-edge products such as Unified Communications, IP-PBX, Universal Gateways, Convergence, VOIP Gateways, GSM Gateways, IP Video Surveillance, Access Control and Time-Attendance. These solutions are feature-rich, reliable and conform to the international standards. Having global footprints in Europe, North America, South America, Africa and Asia through an extensive network of more than 1000 system integrators, Matrix ensures that the products serve the needs of its customers faster and longer. Matrix has gained trust and admiration of customers representing the entire spectrum of industries. Matrix has won many national and international awards for its innovative products.

\* Specifications are subject to change without prior notice.

Note: IK10 certificate shall be available from March'20.

Customer Care: 1800-258-7747 E-mail: <a href="mailto:lnquiry@MatrixComSec.com">lnquiry@MatrixComSec.com</a> www.MatrixVideoSurveillance.com